PBU

Propane Burnishers





www.clarkeus.com

Clarke

Cleaning Power Since 1916.

Clarke® PBU Burnishers Provide Powerful Results with Superior Dust Control






All models have Kawasaki Twin-V engines that provide maximum power.



Large 20 lb. 80% safety fill propane tanks offers long working time between refills and also prevents overfilling.



Balanced pad drivers reduce vibration and are flexible to follow the contour of uneven surfaces over floors.

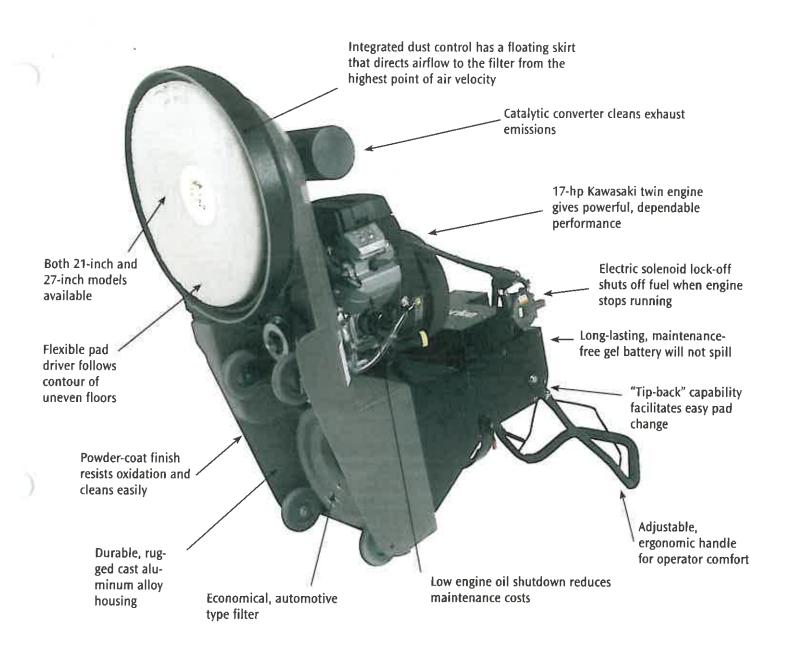



The Dust Control series offers a unique floating shroud that directs the high velocity airflow near the floor to collect six times as much dust as competitive models.




Automotive style air filter for improved indoor air quality. Dust Control system extends pad life by preventing particle build-up in the pad.



Control panel lights inform operator of emissions controls and engine performance. Planned maintenance intervals are easily monitored with the on-board hour meter and the standard keyignition switch prevents unauthorized use.

PBU Propane-Powered Burnishers





KEY FEATURES

- · Sizes and configurations for any application
- · Optional features for complete versatility
- · Clean and efficient catalytic converter
- · Effective dust and emissions control

	Non-Dust Control							Dust Control	
	2113E	2113ECL	2113BCAT	2117B	2117BCAT	2717B	2717BCAT	2117BCATCL	2717BCATCL
Part Number	080018	08002B	08012B	08989B	08945B	08987B	08947B	08992B	08993B
Pad Size			21" (53 cm)	27" (68 cm)					
Engine	13	hp Twin-V Kawa	ısaki	17 hp Twin-V Kawasaki					
Catalytic Muffler	No	No	Yes	No	Yes	No	Yes	Yes	Yes
Carb Gard	No	No	No	No	No	No	No	Yes	Yes
Clutch	None	Centrifugal	None	None	None	None	None	Centr	rifugal
Pad Speed	2100 RPM	2100 RPM	2100 RPM	2100 RPM	2100 RPM	1500 RPM	1500 RPM	2100 RPM	1500 RPM
Propane Tank	20 lb (9.1 kg) Capacity, 80% Safety Fill								
Auto Fuel Shutoff	Yes								
Low Oil Shutdown	Yes								
Hour Meter	Yes								
Sound Level	87 - 89 dB(A)								
Productivity Rate	25,000 ft ² /hr (2,322 m ² /hr)					33,000 ft ² /hr (3,066 m ² /hr)		25,000 ft ² /hr (2,322 m ² /hr)	33,000 ft ² /hr (3,066 m ² /hr)
Agency Approvals	EPA, plus UL Approved Propane Components								
CARB Certified (California Air Resources Board)	No	No	Yes	No	Yes	No	Yes	Yes	Yes
Weight	195 lbs	198 lbs	208 lbs	220 lbs	223 lbs	242 lbs	245 lbs	276 lbs	298 lbs
Dimensions: Length	51.5" (131.8 cm)					59" (149.9cm)		66" (167.4 cm)	69" (175.3 cm)
Width	23.3" (59 cm)					29.3" (74.4 cm)		23.5" (59.7 cm)	29.5" (74.9 cm)
Height	43" (109.2 cm)								
Warranty	2 Years Parts & Labor								

WHAT ENHANCES ITS PRODUCTIVITY?

- Powerful engine maintains speed under heavy loads
- Flexible pad driver follows contour of uneven floors
- Large 20-pound (9-kg) propane tank offers long working time between refills
- Effective dust control eliminates dust on merchandise, reduces pad build-up

WHAT DOES IT DO BEST?

- Accomplishes high-gloss burnishing with the most power available
- Completes large areas fast for high productivity
- Reduces operator fatigue with ergonomic comfort
- · Easy to maintain

WHAT ARE ITS OPTIONAL FEATURES?

- 80% safety fill, polished tank
 - Carbon monoxide monitor
- Tank storage cages

WHAT ARE ITS SAFETY FEATURES?

- · Catalytic converter for clean air exhaust
- · "Carb Gard" emissions monitor
- · 80% safety fill tanks prevent overfilling
- · Safety certification program

Clarke[®]

2100 Hwy. 265 Springdale, AR 72764 www.clarkeus.com

Customer Relations:

1.800.253.0367

Fax Orders to:

1.800.825.2753

Technical Service:

1.800.356.7274

© 2008 ALTO U.S. Inc. All Rights Reserved. Specifications subject to change without notice. P. N. 70509A. 09/08

DISTRIBUTED BY:

